

**40-Y-....**  
w.st.nr: 1.4122  
Gehärtet 42 HRc

**40-Y304-....**  
w.st.nr: 1.4301



**40-Y316L-....**  
w.st.nr: 1.4404

**40-Y321-....**  
w.st.nr: 1.4541

**40-YH-....**  
w.st.nr: 1.4841

Größe	n	d	Größe	n	d
0	10	1.0	0	12	1.0
1	10	1.1	1	12	1.1
2	10	1.2	2	12	1.2
3	10	1.3	3	12	1.3
4	10	1.4	4	12	1.4
5	10	1.5	5	12	1.5
6	10	1.6	6	12	1.6
7	10	1.7	7	12	1.7
8	10	1.8	8	12	1.8
9	10	1.9	9	12	1.9
10	10	2.0	10	12	2.0
11	10	2.1	11	12	2.1
12	10	2.2	12	12	2.2
13	10	2.3	13	12	2.3
14	10	2.4	14	12	2.4
15	10	2.5	15	12	2.5
16	10	2.6	16	12	2.6
18	10	2.8	18	12	2.8

Hinweis für Vorfiltrung  
d = kleinsten Durchmesser

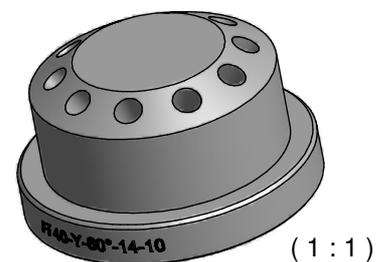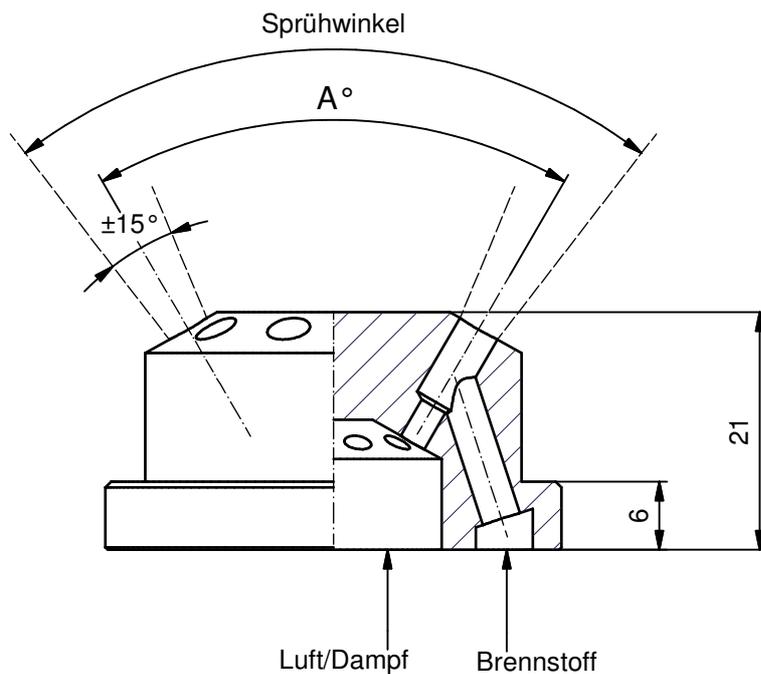


**BESTELLUNG:**

bitte spezifizieren

- Düsentyp
- Winkel A°
- Größe
- Anzahl der Bohrungen
- Stückzahl

**MARKIERUNG:**

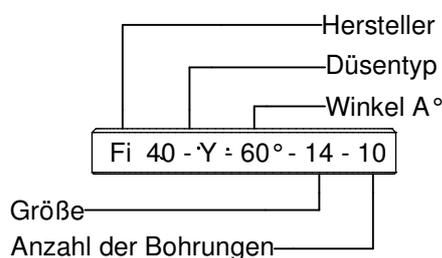

**ALGEMEINE DATEN:**

Winkel A° von 20° bis 100°  
in Schritte von 5° verfügbar.  
Max. Viskosität: 40 cSt.