




Atomizer 12
W4-"size"-60°-L

12-EDL1-4G-E

21-03-08

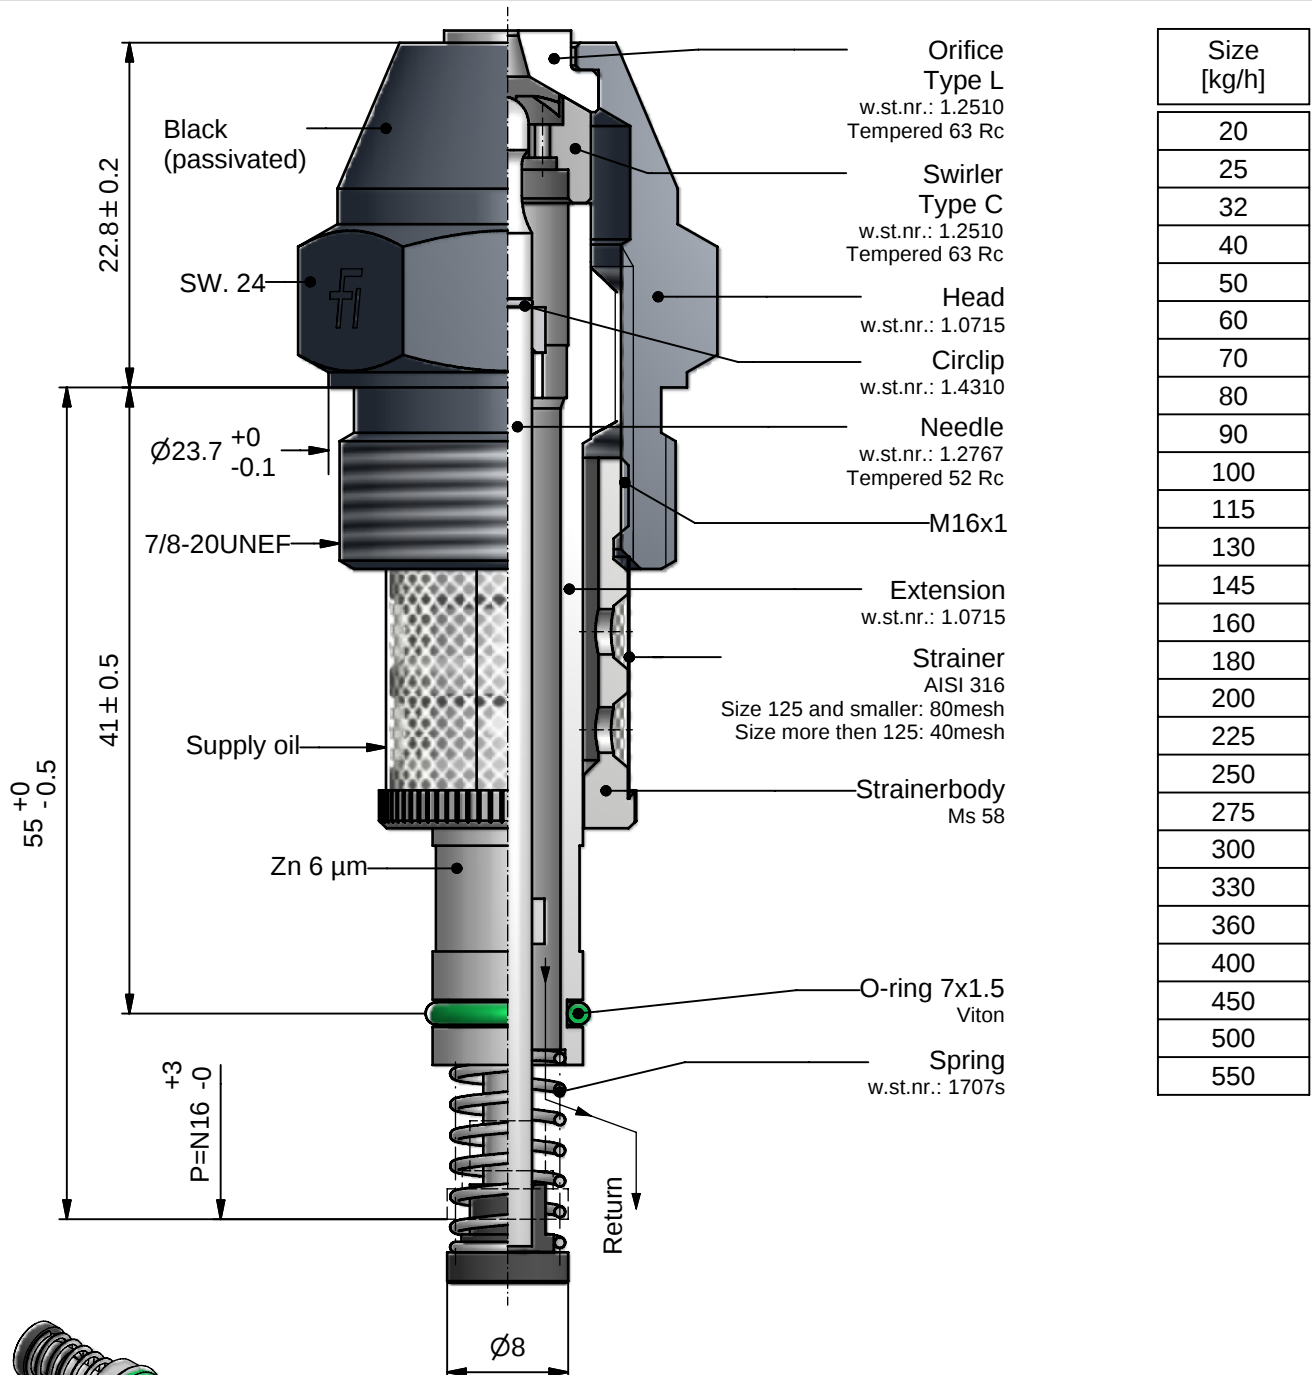

Orifice
Type L
w.st.nr.: 1.2510
Tempered 63 Rc

Swirler
Type C
w.st.nr.: 1.2510
Tempered 63 Rc

Head
w.st.nr.: 1.0715

Circlip
w.st.nr.: 1.4310

Needle
w.st.nr.: 1.2767
Tempered 52 Rc

M16x1

Extension
w.st.nr.: 1.0715

Strainer
AISI 316
Size 125 and smaller: 80mesh
Size more than 125: 40mesh

Strainerbody
Ms 58

O-ring 7x1.5
Viton

Spring
w.st.nr.: 1707s

Size
[kg/h]

20

25

32

40

50

60

70

80

90

100

115

130

145

160

180

200

225

250

275

300

330

360

400

450

500

550

GENERAL DATA:

Test oil viscosity: 5 cSt.
Supply pressure: 25 Bar.

Max. output with closed return line.

Turn down 1:5 at 3 bar return pressure.

Max. output: up to 80 0% +10%
up to 180 0% +7%
over 180 0% +5%

Spray angle: Max. output 60°+5°
Turned down 90°+10°

ORDERING: please specify:

- Atomizer type
- Size
- Spray angle
- Quantity

Marking on Hexagon:

