




Atomizer 12
W3-"size"-80°-L

12-EFSM-4G-E

29-08-11

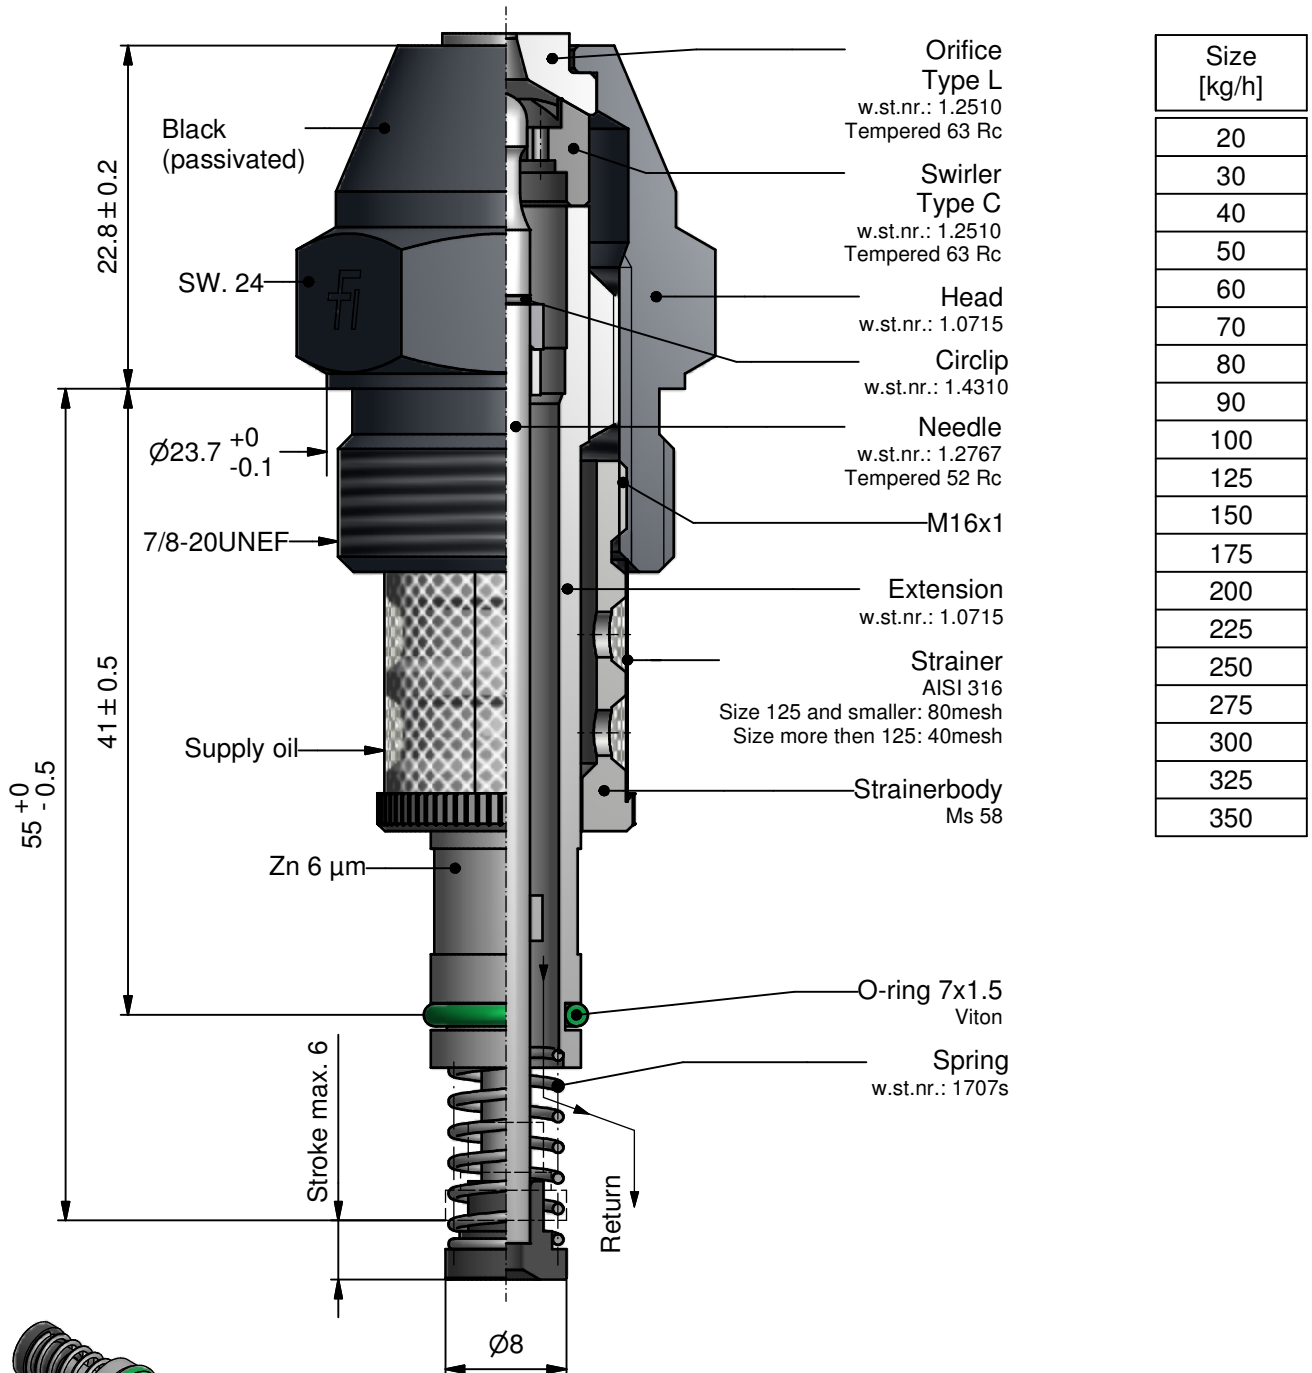

Size [kg/h]
20
30
40
50
60
70
80
90
100
125
150
175
200
225
250
275
300
325
350

Orifice
Type L
w.st.nr.: 1.2510
Tempered 63 Rc

Swirler
Type C
w.st.nr.: 1.2510
Tempered 63 Rc

Head
w.st.nr.: 1.0715

Circlip
w.st.nr.: 1.4310

Needle
w.st.nr.: 1.2767
Tempered 52 Rc

M16x1

Extension
w.st.nr.: 1.0715

Strainer
AISI 316
Size 125 and smaller: 80mesh
Size more then 125: 40mesh

Strainerbody
Ms 58

O-ring 7x1.5
Viton

Spring
w.st.nr.: 1707s

GENERAL DATA:

Test oil viscosity: 5 cSt.
Supply pressure: 25 Bar.

Max. output with closed return line.

Turn down 1:3 at 3 bar return pressure.

Max. output: up to 80 0% +10%
up to 175 0% +7%
over 175 0% +5%

Spray angle: Max. output 80°+5°
Turned down 100°+10°

ORDERING: please specify:

- Atomizer type
- Size
- Spray angle
- Quantity

Marking on Hexagon:

