


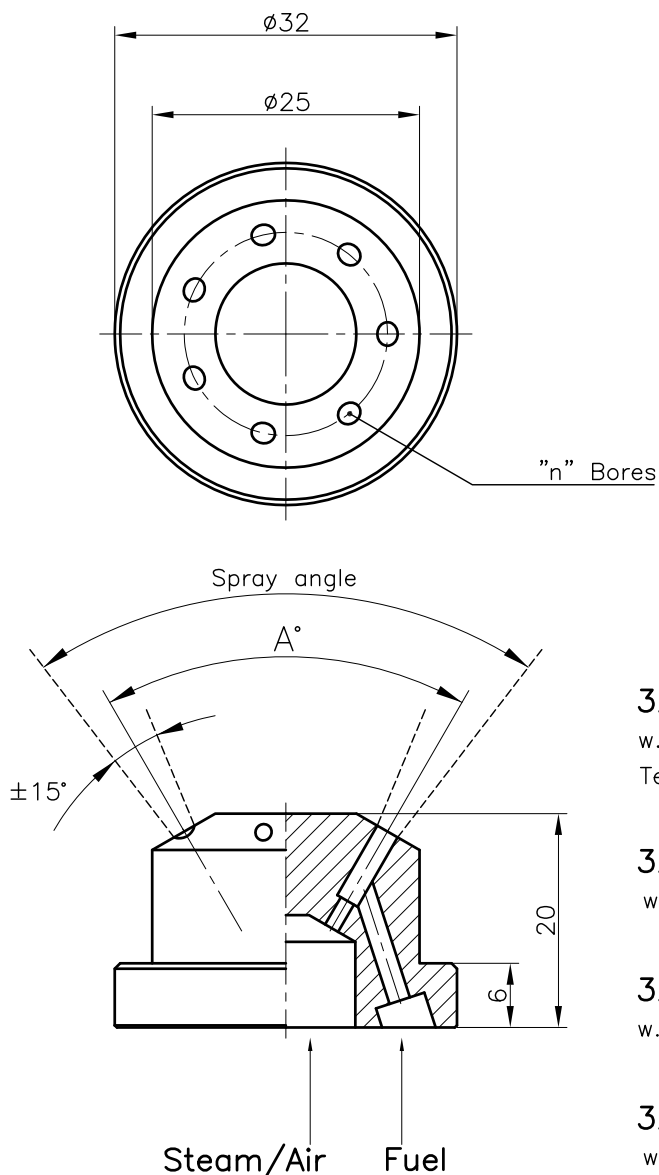

Size	n	d
00	3	0.9
00	4	0.9
00	5	0.9
00	6	0.9
00	7	0.9
0	7	1.0
1	7	1.1
2	7	1.2
3	7	1.3
4	7	1.4
5	7	1.5
6	7	1.6
7	7	1.7
8	7	1.8
9	7	1.9
10	7	2.0
11	7	2.1
12	7	2.2
14	7	2.4

32-Y-....

w.st.nr: 1.4122

Tempered 42 Rc

32-Y304-....

w.st.nr: 1.4301

32-Y316L-....

w.st.nr: 1.4404

32-Y321-....

w.st.nr: 1.4541

32-YH-....


w.st.nr: 1.4841

Remark for pre-filtering
d = smallest diameter

ORDERING: please specify:

- Atomizer type
- Angle A°
- Size
- Number of bores
- Quantity

MARKING:



GENERAL DATA:

Angle A° from 20° upto 100°
available in steps of 5°.
Max. viscosity: 40 cSt.