





Air-/Steam Atomizer 40-Y-A°-Nr.-10

Output graph
Fuel output in kg/h



40-YEL310-910

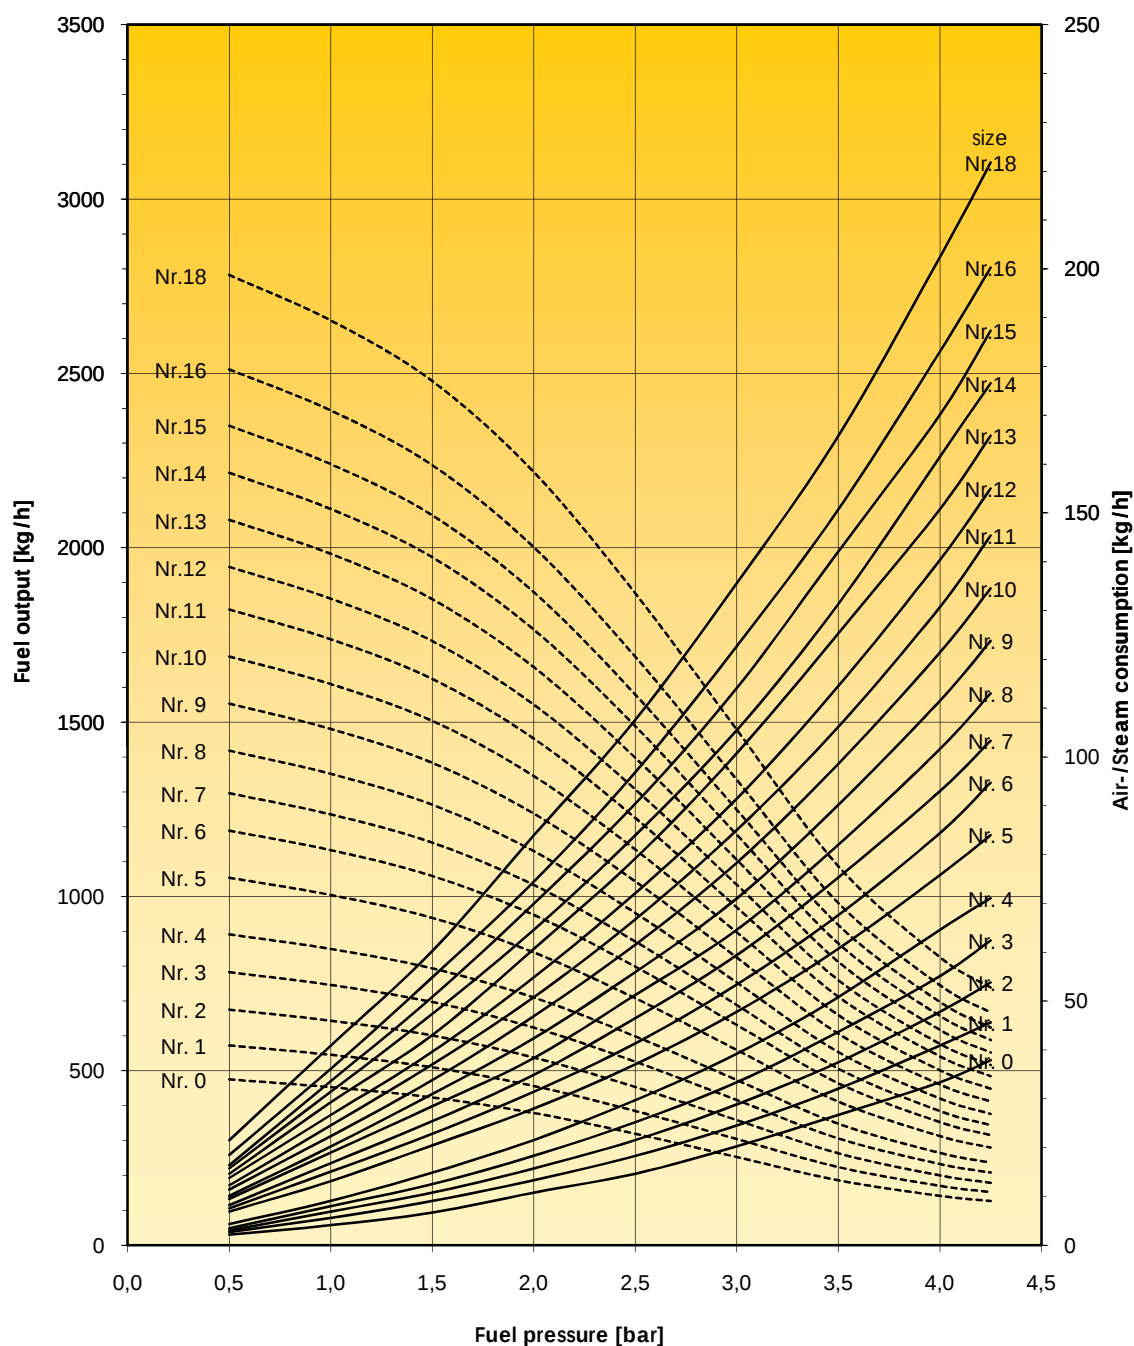

Operating conditions:

Air-/Steam pressure: 3 [bar]

Number of bores: 10 [-]

Medium: Extra light heating oil

Viscosity: 5 [mm²/s]





Air-/Steam Atomizer 40-Y-A°-Nr.-10

Output graph
Fuel output in kg/h



40-YEL410-910

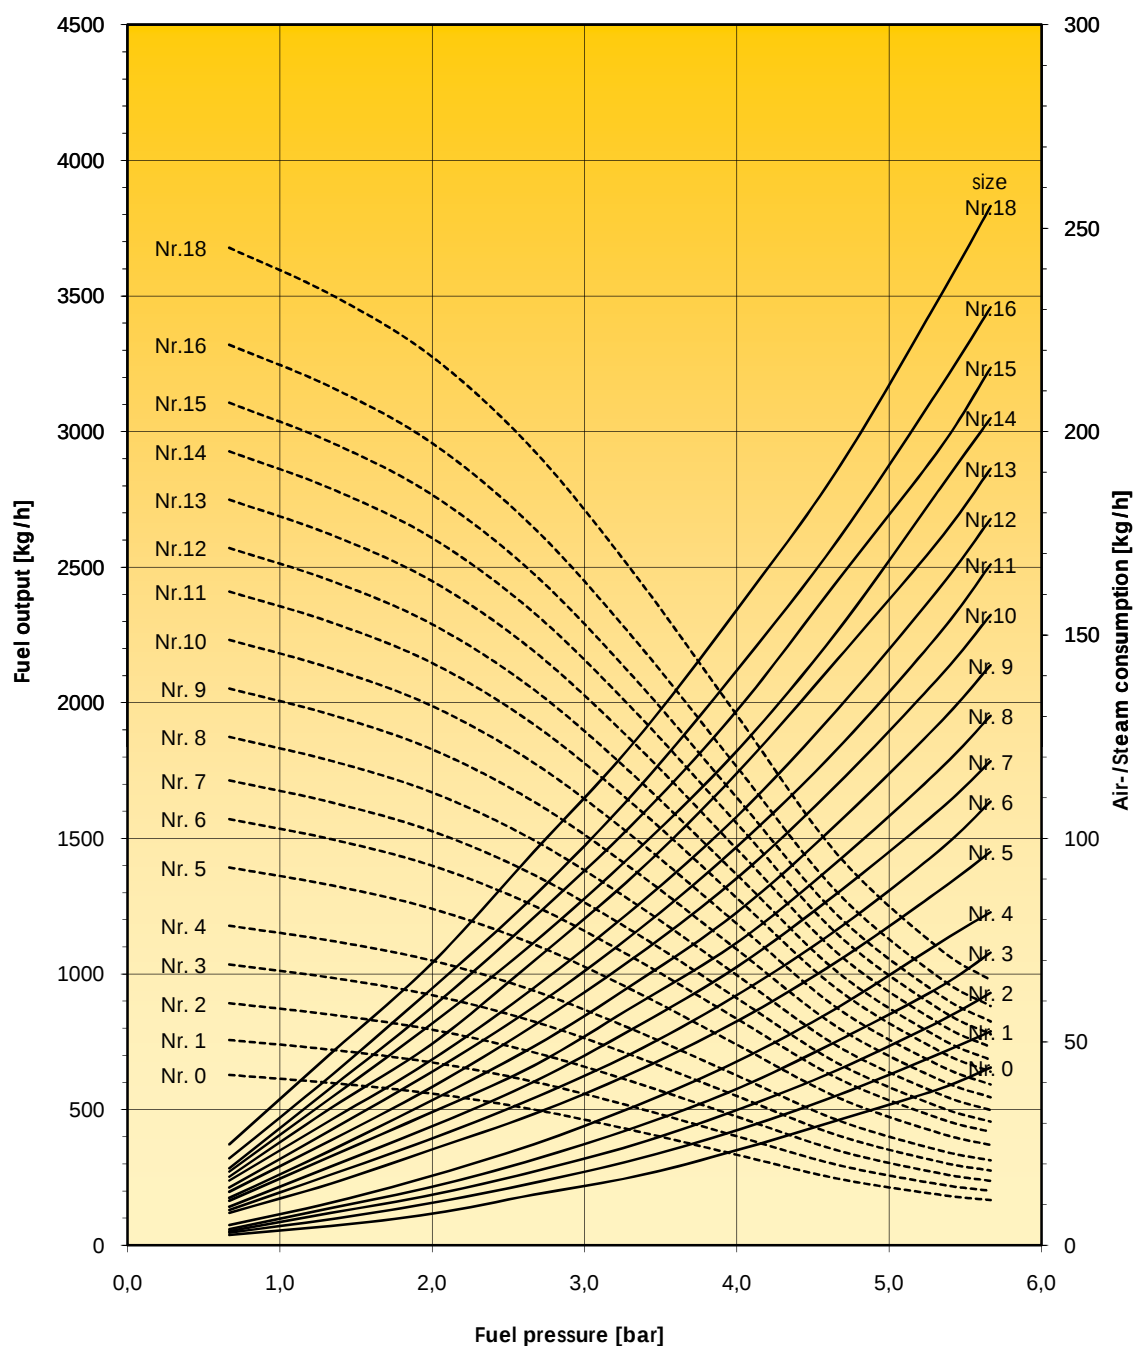

Operating conditions:

Air-/Steam pressure: 4 [bar]

Number of bores: 10 [-]

Medium: Extra light heating oil

Viscosity: 5 [mm²/s]





Air-/Steam Atomizer 40-Y-A°-Nr.-10

Output graph
Fuel output in kg/h



40-YEL510-910

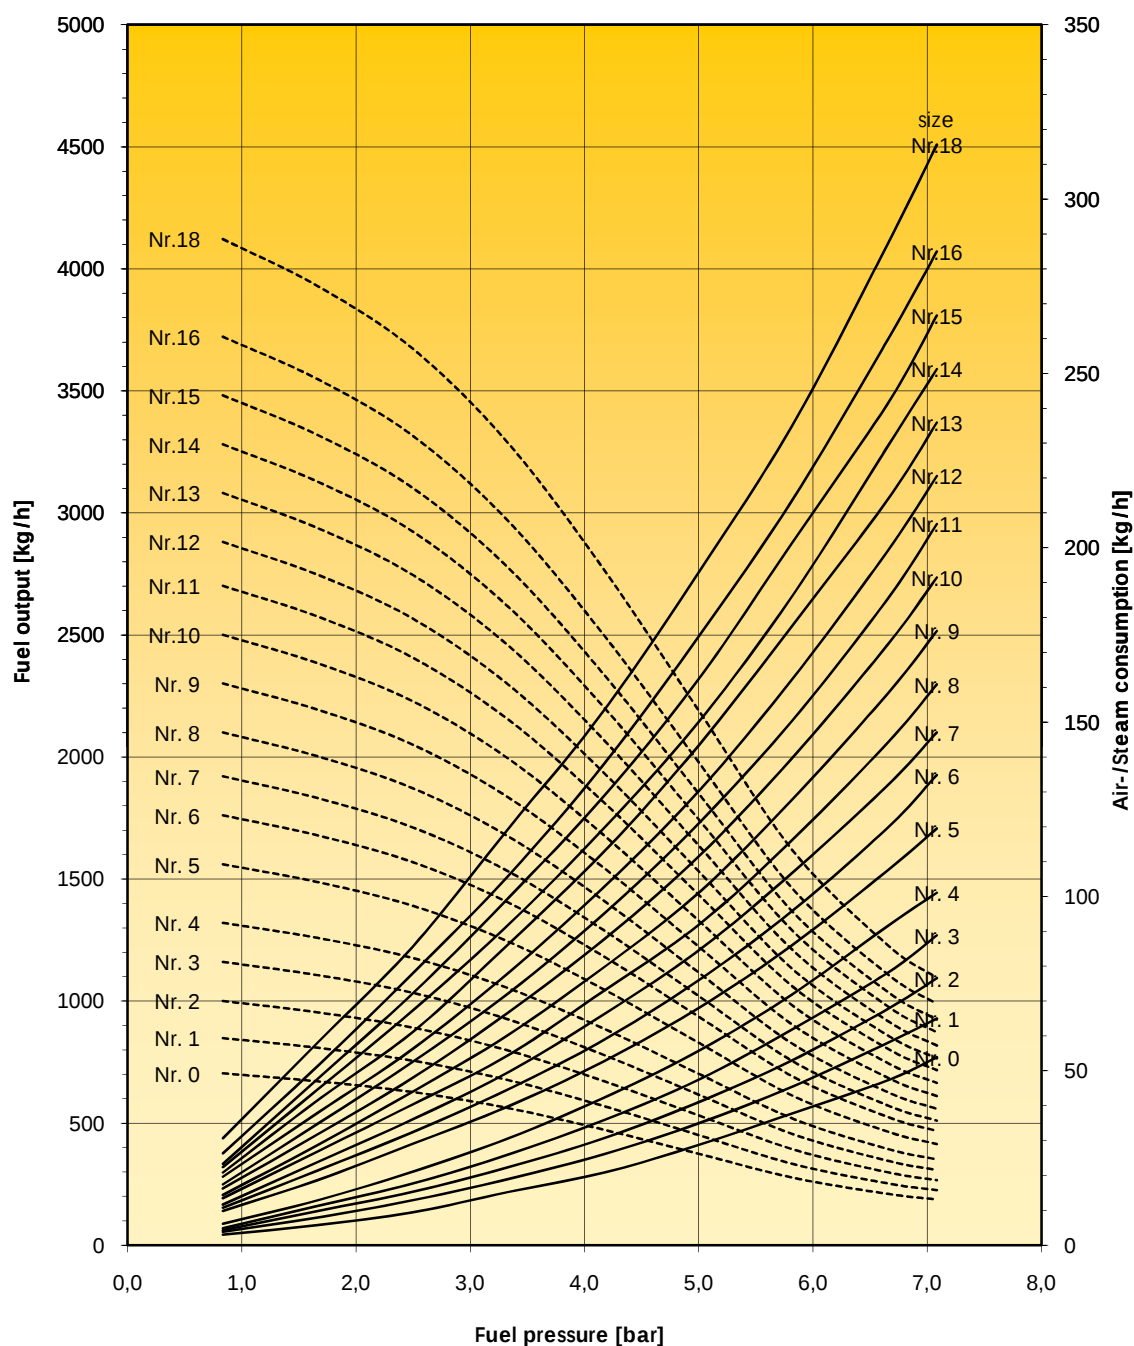

Operating conditions:

Air-/Steam pressure: 5 [bar]

Number of bores: 10 [-]

Medium: Extra light heating oil

Viscosity: 5 [mm²/s]





Air-/Steam Atomizer 40-Y-A°-Nr.-10

Output graph
Fuel output in kg/h



40-YEL610-910

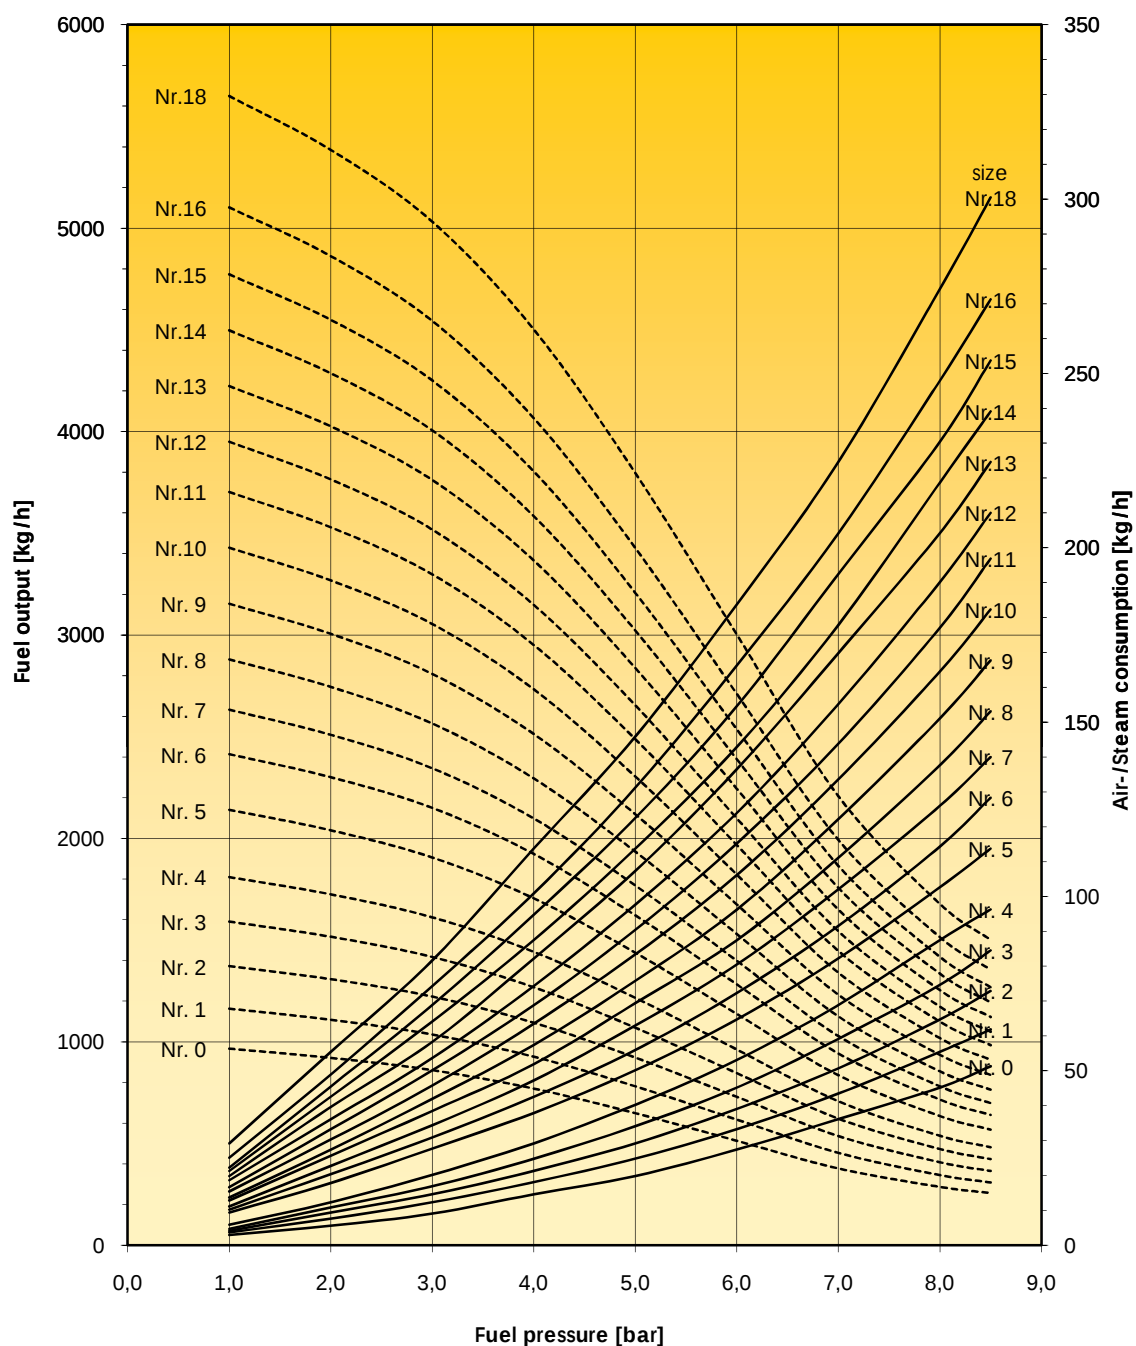

Operating conditions:

Air-/Steam pressure: 6 [bar]

Number of bores: 10 [-]

Medium: Extra light heating oil

Viscosity: 5 [mm²/s]




Air-/Steam Atomizer 40-Y-A°-Nr.-10

Output graph
Fuel output in kg/h



40-YEL710-910

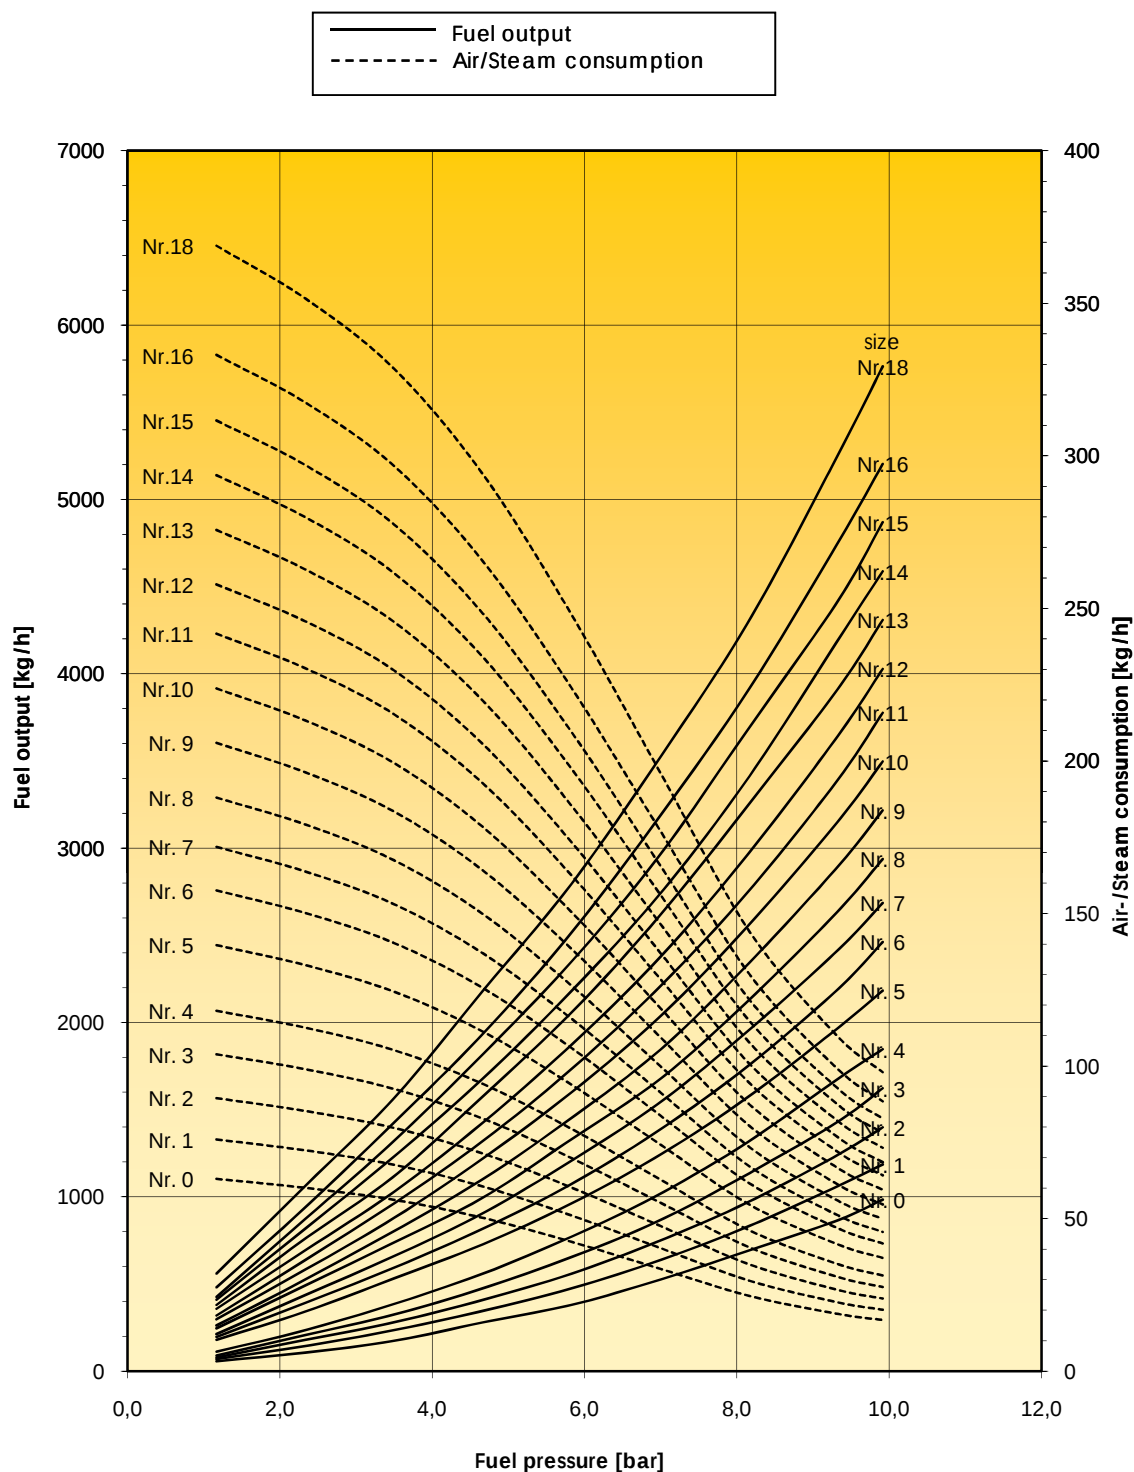

Operating conditions:

Air-/Steam pressure: 7 [bar]

Number of bores: 10 [-]

Medium: Extra light heating oil

Viscosity: 5 [mm²/s]